



产品特性/Product Features

IP6K9K

250A 85°C长时间载流能力

12-750VDC

1000M Ω (1000VDC) , IEC 60664-

1

PWM

1000MΩ(1000VDC)
3000VAC 1min
3000VAC 1min
≤30ms
≤10ms
196m/s ²
490m/s ²
10Hz~500Hz 49m/s ²
5%~85%RH
-40°C~85°C
/
400g

9~2	≥4.5	26W 3W
-----	------	-----------

~85°C)

订货标准

HFEVC

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10


- **C N SM** -

7 8 9 10

H:
Y:
: 450V 750: 750V
V 24: DC24V PWM: 9V~24V
L:
N:
SM:

/Unit mm

73

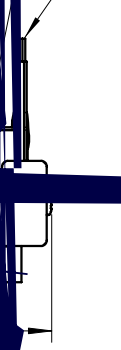

*) i" @q °) < P `` * p\$ „ È BSA`Y ÖR6 ð S *F` fs *F` , TM Ä`ó *E7) 0ua X%%8R!4rE4X%%8R C



3mm



9 ~

85°C ,

100mm²



1



M5螺钉 (内螺纹)	8N·m 4N·m	Ø5.0~Ø5.5	z 3/0rWB`	M5螺钉	3N·m~4N·m
M8	10N·m 12N·m	Ø8.0~Ø8.5	3mm		

2

100m

3

3mm