



### 产品特性/Product Features


- IP6K9K
- 50A 85°C
- 12-750VDC
- 1000M 1000VDC IEC 60664-1
- 

### 触点参数 / Contact parameters

		1a	
		1m (at 20A)	
		50A	
		2×10 <sup>5</sup>	
		450V型	750V型
		1000VDC	1000VDC
		500A (320VDC)1	500A (320VDC)1
		22.5kW	37.5kW
1		1.5×10 <sup>4</sup> 450VDC, 50A	4×10 <sup>3</sup> 750VDC, 50A
		2×10 <sup>4</sup> 450VDC,50A)	1×10 <sup>4</sup> 750VDC,50A
2		50A:	
		80A:10min	
		120A:60s	
		500A:1s	

1 23 0.6s:5.4s


2 85 14 mm<sup>2</sup> " "

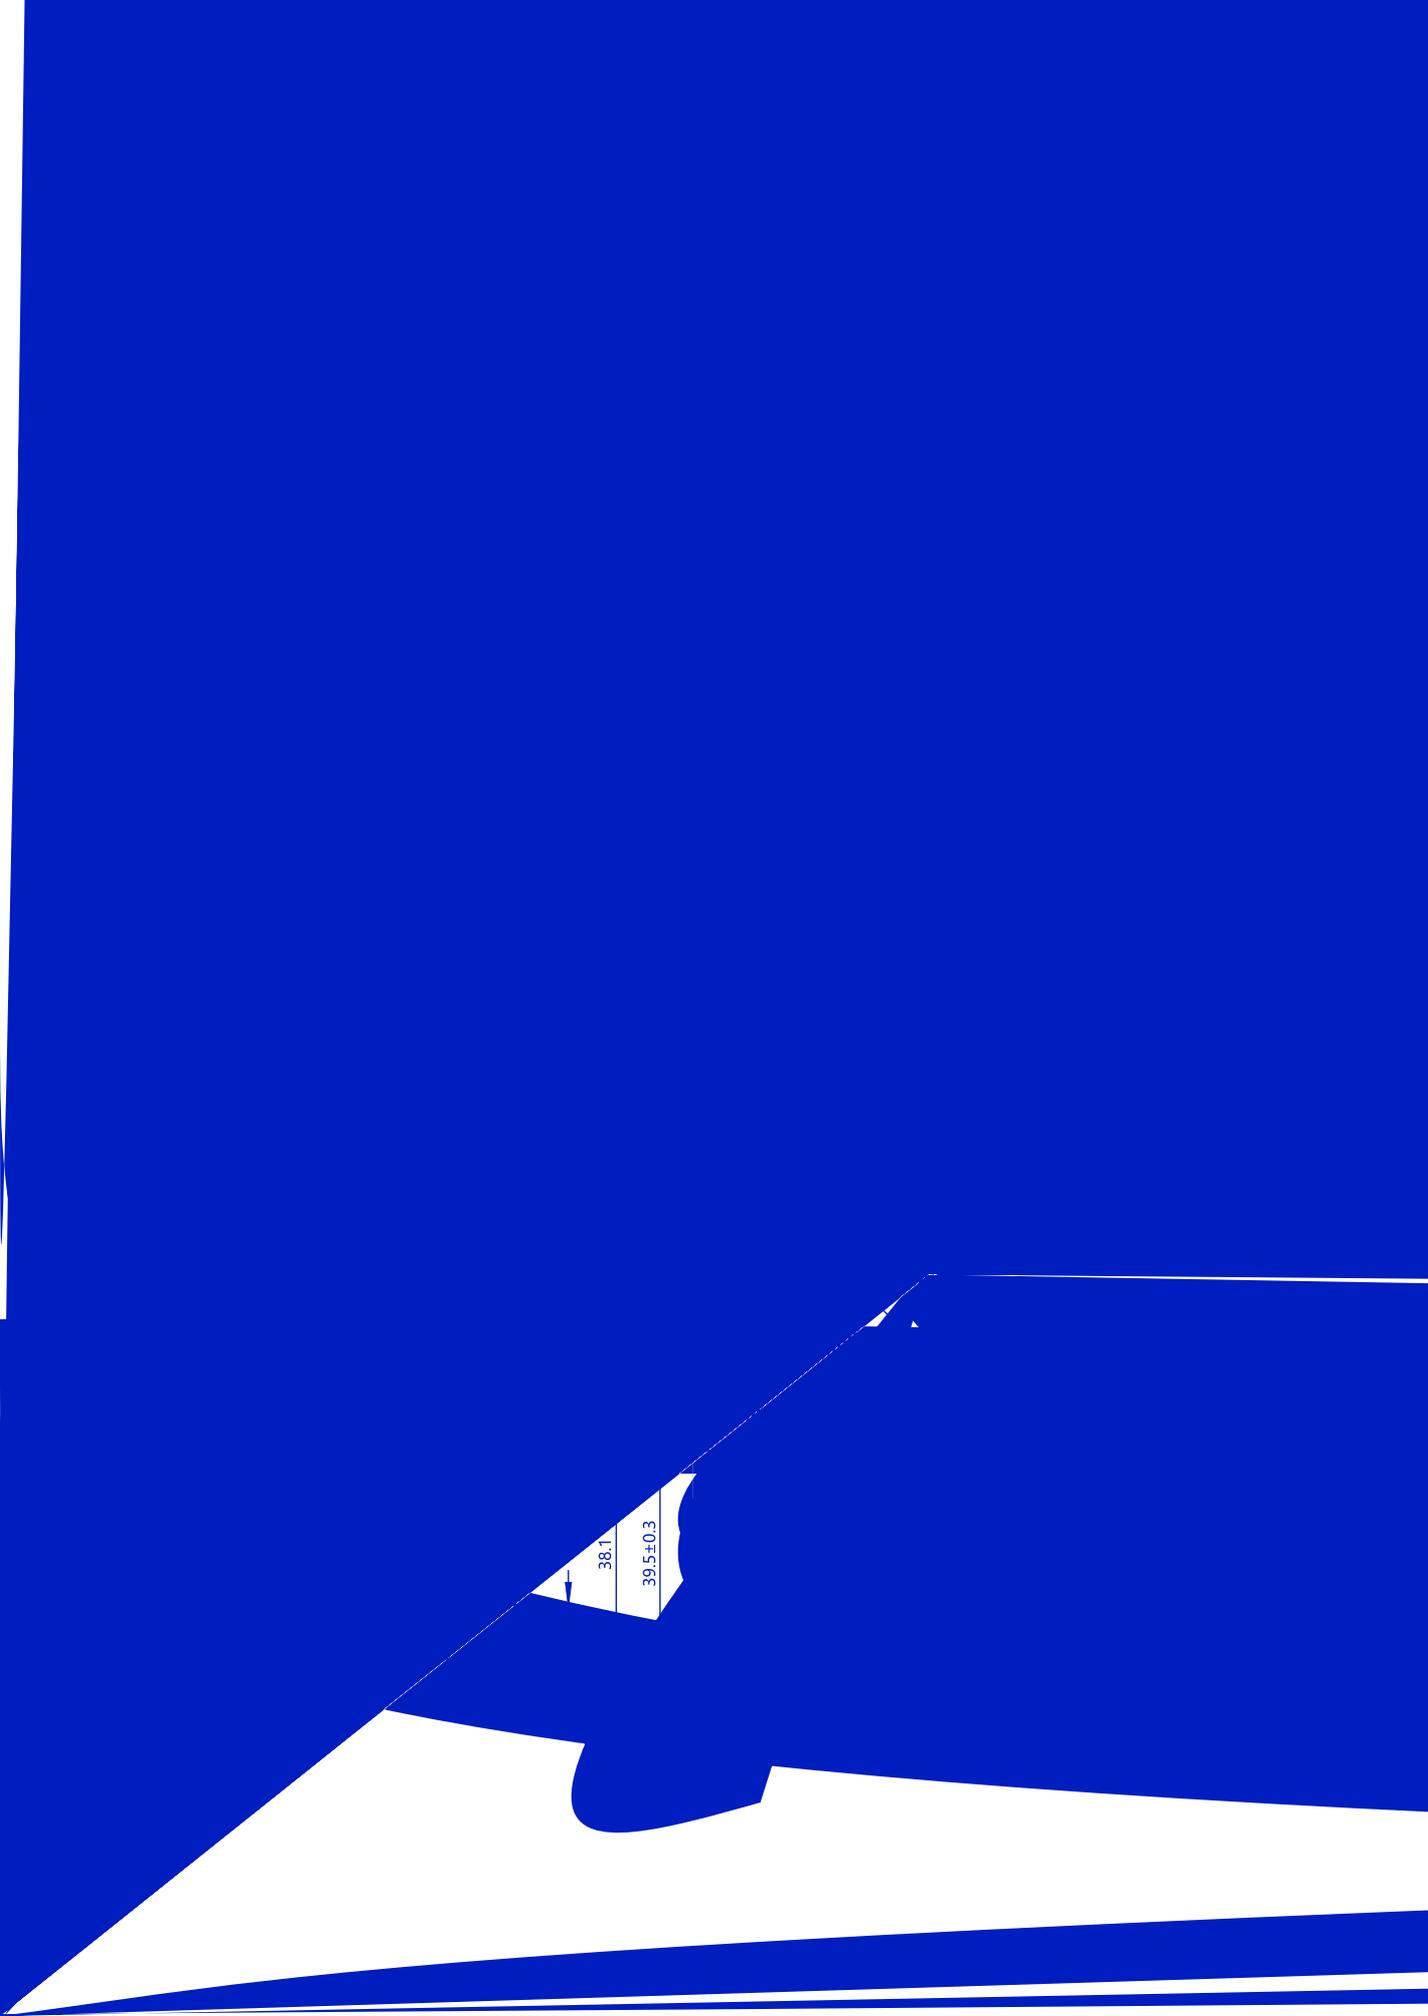

38.1

39.5±0.3

Mounting hole size

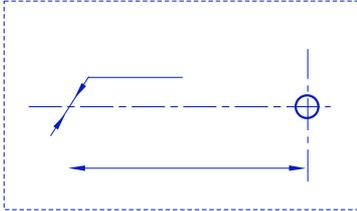

Wiring diagram

